# Mallory Sonalert Products,Inc.

| Part #: | ZT120LACTY |
|---|---|
| Revision: | E |

## Sales Outline Drawing


## Specifications:


| | |
|---|---|
| Sound Level Category | Loud |
| Mode of Operation | Continuous |
| Lens Color | Opaque White |
| LED Color | YELLOW |
| LED Mode of Operation | Continuous |
| Voltage Rating | 90 to 120 VAC |
| Frequency | 3900 ± 500 Hz |
| Loudness @ 2 FT | 85 to 95 dB(A) Typ. |
| Current Draw | 40mA MAX |
| Housing Material | 6/6 Nylon, Color: Black |
| Front Cap Material | 6/6 Nylon, Color: Opaque White |
| Storage Temperature | -40° to +80° C |
| Operating Temperature | -30° to +65° C |
| Panel Mounting | Recommended hole size is 22.5 mm. Thread front will fit standard 22.5mm hole. |
| Knurled Nut | Used to attach part to panel. The max recommended torque is 10 in-lbs. |
| Weight (Typical) | 28 g |
| NEMA 3R,4X, & 12 | Approved with use of included gasket. |
| Options | Please contact factory. |

## Dimensions: Inches (mm)

**cUL Recognized** **ROHS Compliant**

PATENT NUMBER 9165440

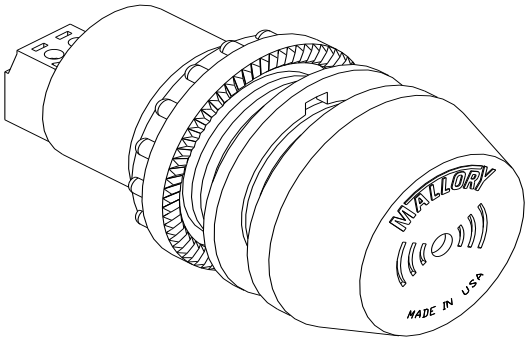

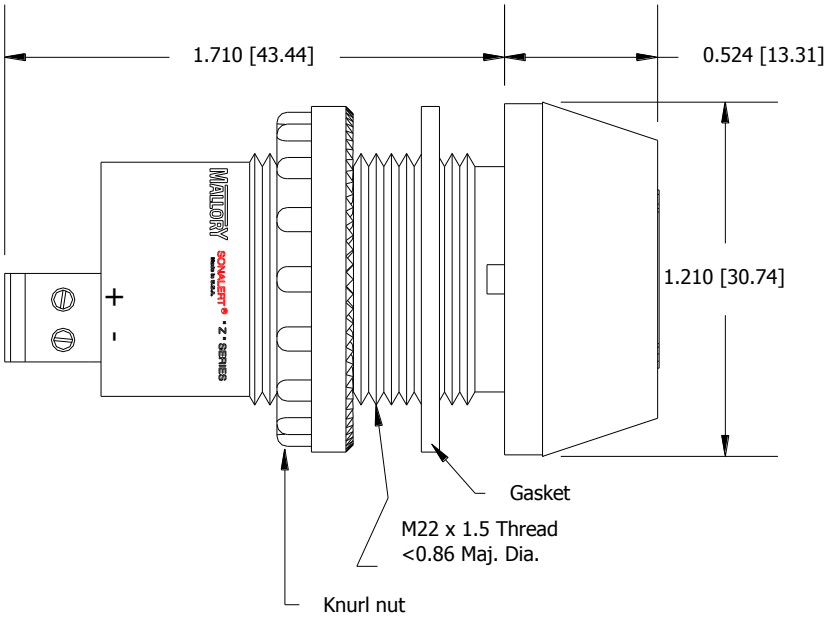
4411 South High School Road, Indianapolis, Indiana 46241 U.S.A · Phone: (317) 612-1000 Fax: (317) 612-1010 www.mspindy.com