

© 2023 TE Connectivity. All Rights Reserved.

TAPE ON REEL PACKAGING ACCORDING TO DIN IEC 60286-3
PACKAGING UNIT: 100 PCS


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	NEW DRAWING	08NOV2023	ASB	JDB
	C1	DRAWING RE-CREATED IN CREO	28DEC2023	ASB	JDB
	C2	REEL CORE DIA CHANGE	24JUL2024	KA	LET

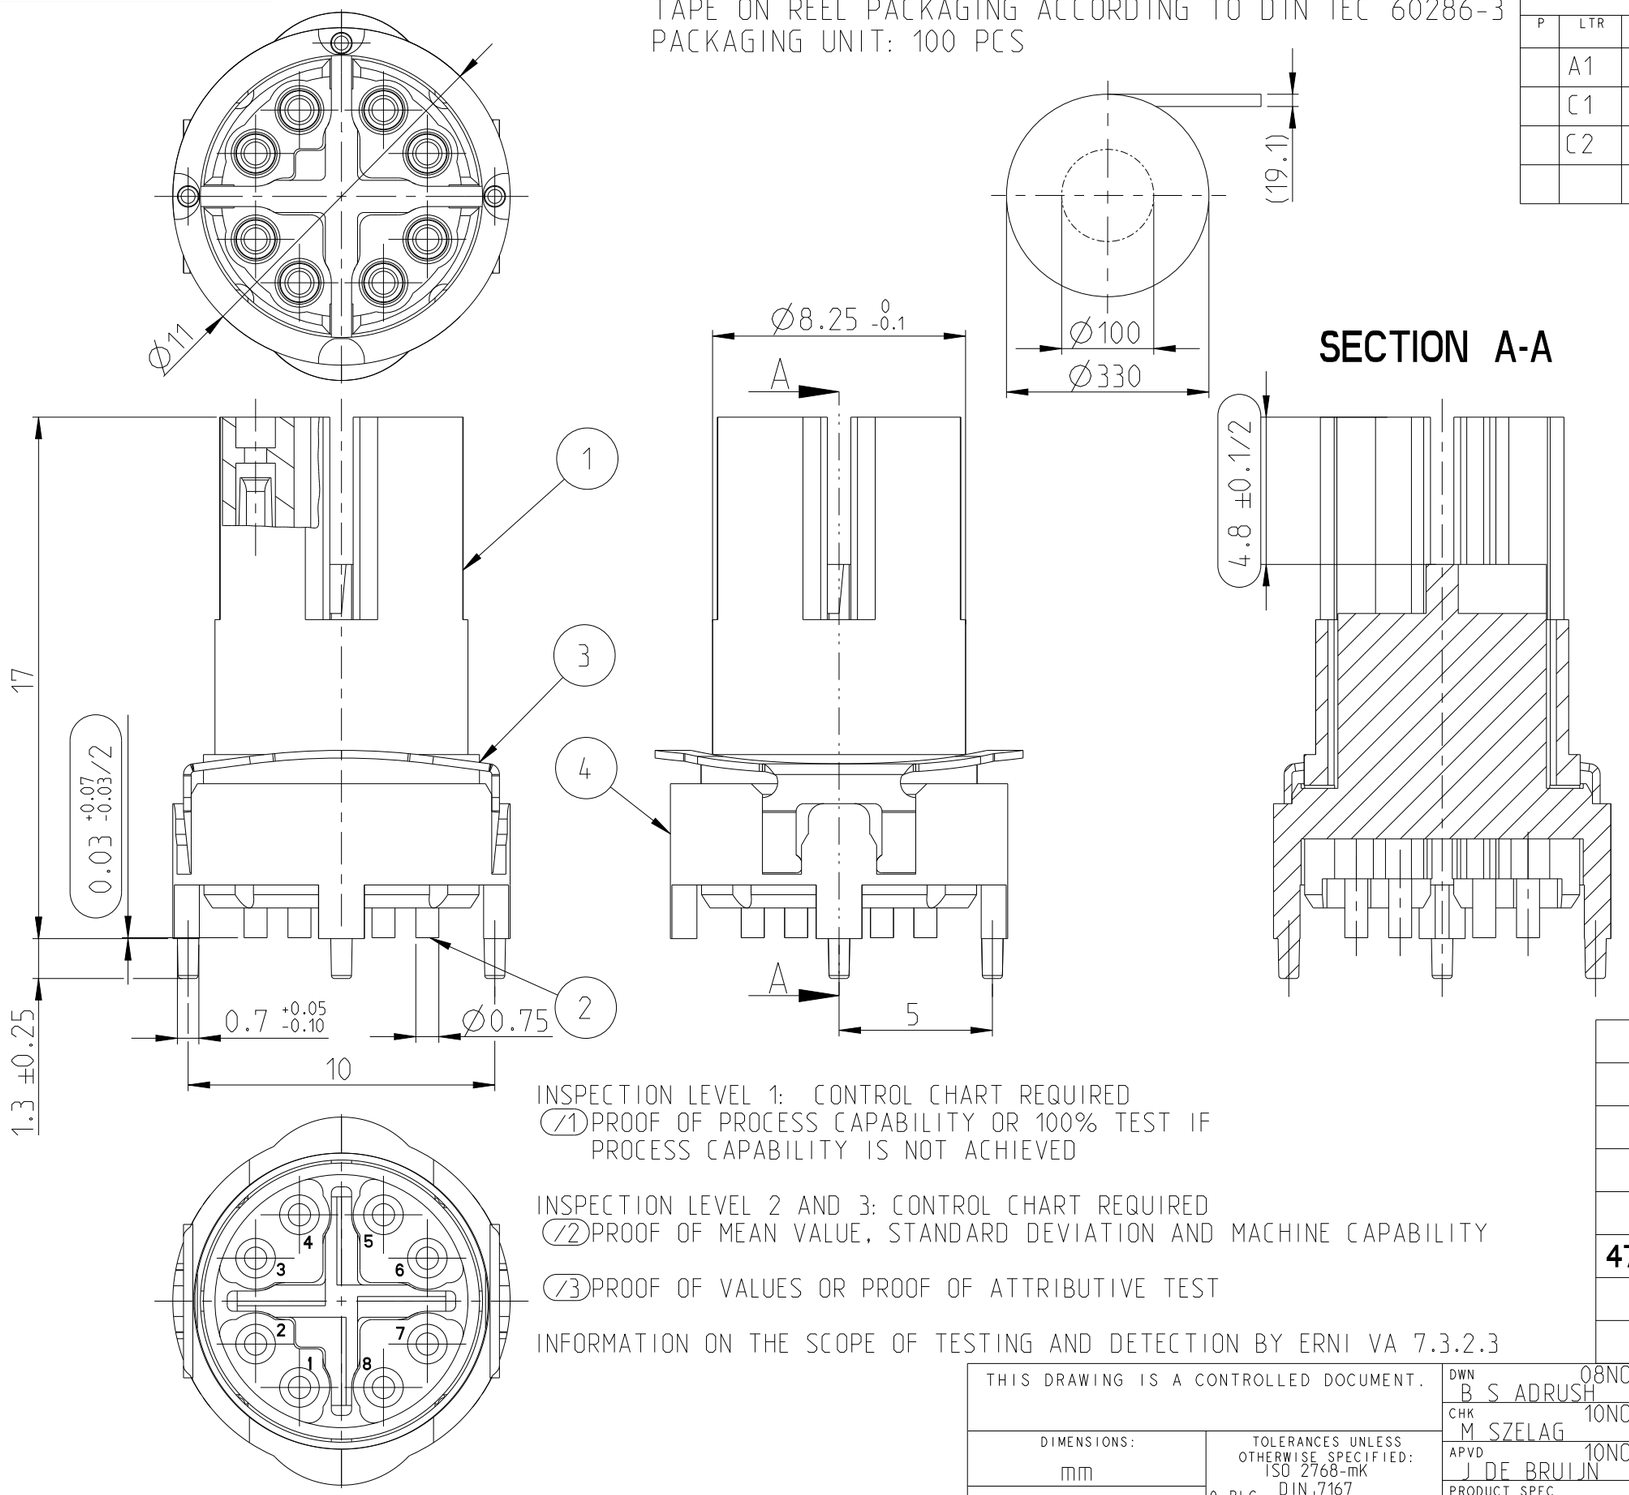

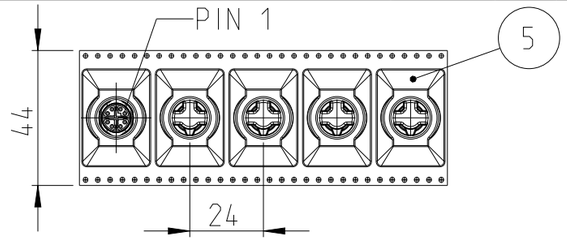

REEL OFF DIRECTION

PCB-LAYOUT PROPOSAL (1.6mm CLEARANCE GROUND-SIGNAL)

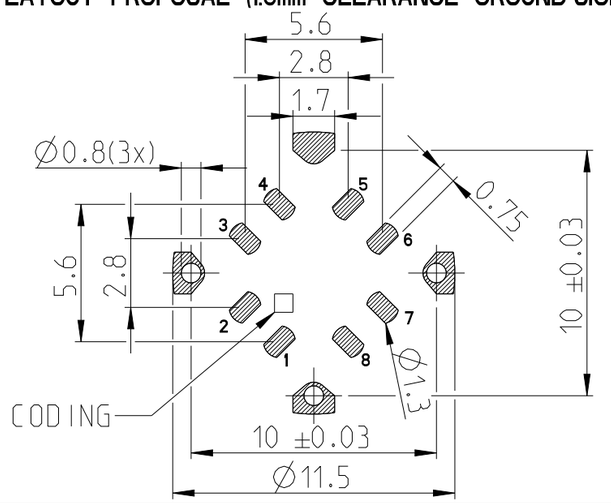

INSPECTION LEVEL 1: CONTROL CHART REQUIRED
/1 PROOF OF PROCESS CAPABILITY OR 100% TEST IF PROCESS CAPABILITY IS NOT ACHIEVED

INSPECTION LEVEL 2 AND 3: CONTROL CHART REQUIRED
/2 PROOF OF MEAN VALUE, STANDARD DEVIATION AND MACHINE CAPABILITY

/3 PROOF OF VALUES OR PROOF OF ATTRIBUTIVE TEST

INFORMATION ON THE SCOPE OF TESTING AND DETECTION BY ERNI VA 7.3.2.3

1. COPLANARITY OF ALL CONTACTS<=0.1mm
2. MISSING INFORATION AND DIMENSIONS PER DIN EN 61076-2-109

QTY	REV	DESCRIPTION	ITEM NO.
1	-	TAPE AND REEL	5
1	-	SHIELD	4
1	-	SHIELD	3
8	-	PINS	2
1	-	HOUSING	1
474771-E	REV	PARTS LIST	
-	REV OF EACH ASSY NO. (WHEN BLANK, USE DWG. REV)		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ISO 2768-mK DIN 7167
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL: -, -
FINISH: -, -

DWN B S ADRUSH 08NOV2023
CHK M SZELAG 10NOV2023
APVD J DE BRUIJN 10NOV2023
PRODUCT SPEC 108-94886
APPLICATION SPEC 114-94781
WEIGHT -

TE Connectivity

NAME M12 FEMALE, X CODE, 8P, 17MM SMT, CAT6A
- -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-474771-E	-

CUSTOMER DRAWING | SCALE 5:1 | SHEET 1 OF 1 | REV C2